

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS


**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

Fig. 1

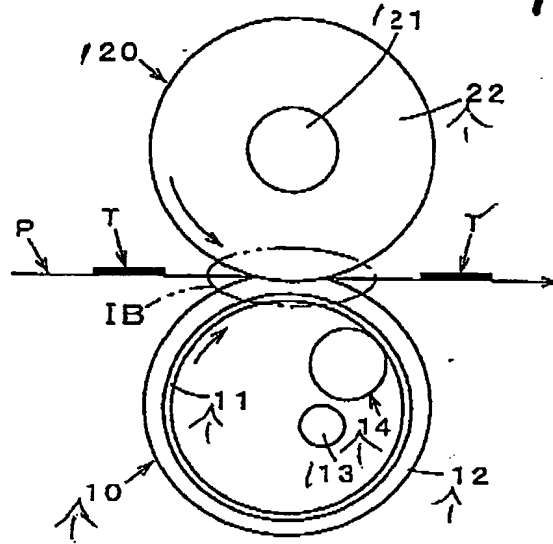


( a )

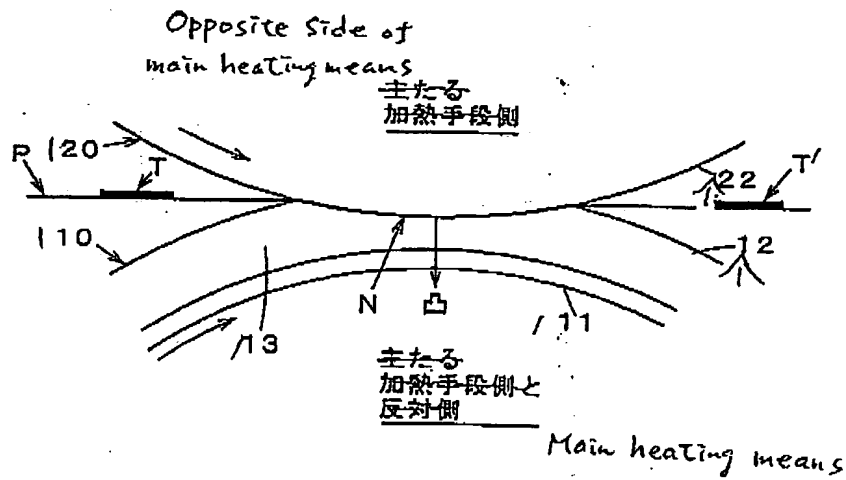


( b )

Fig. 2

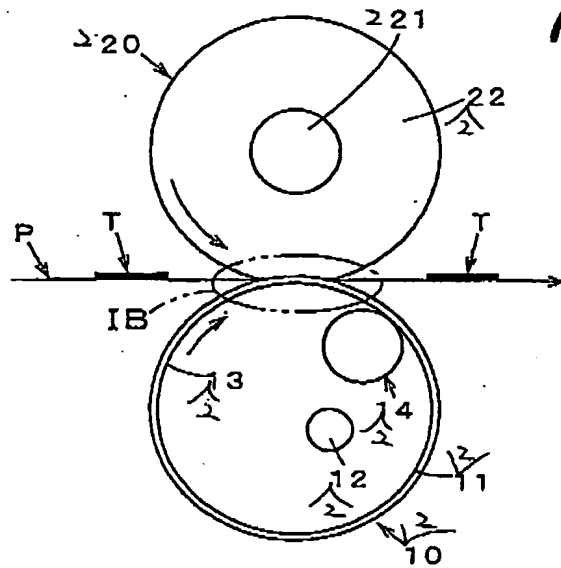


( a )

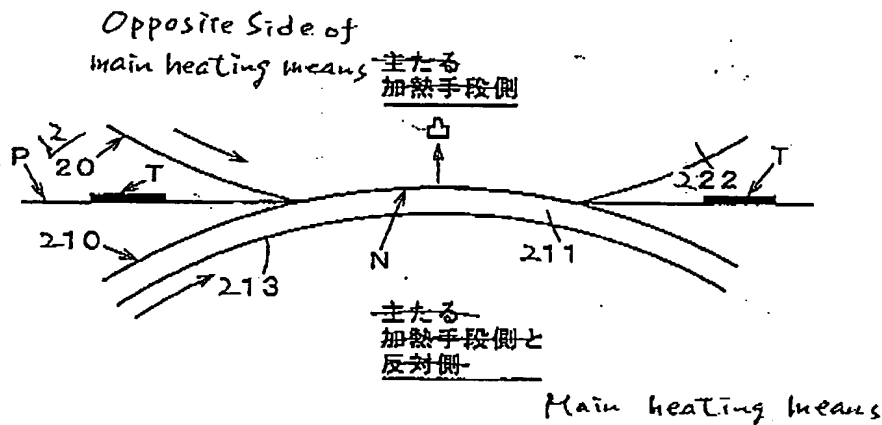

( b )

Fig. 3

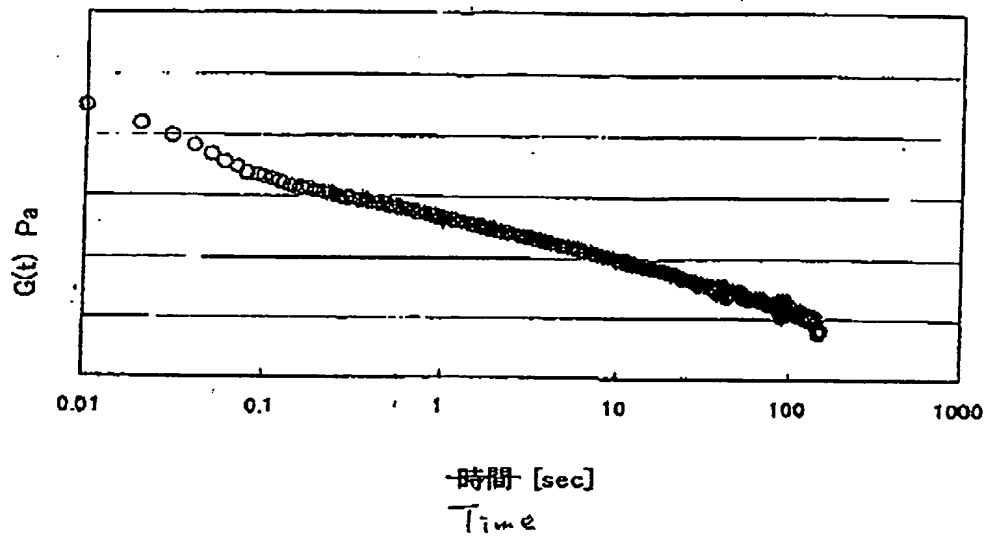

Rie MIYAZAKI, et al.  
TONER  
Mark Boland  
February 27, 2004  
3 of 4

Q80155  
202-293-7060

Transducer  
(which does not rotate)

Measuring instrument  
or viscoelasticity

粘弹性测定装置测定部

A toner is put on the bottom plate, heated with a heater, and the top plate of the parallel plate is put on the toner to press the toner when the toner becomes a little soft. The toner protruding from the parallel plate is removed.

parallel plate

## Hotel

(The bottom plate) can rotate.

(b) When the toner protrude from the plates and does not adhered to the plates.

A measuring sample portion (plate) is set in the heater when the measurement is ran.

Fig. 4

Rie MIYAZAKI, et al.  
TONER  
Mark Boland  
February 27, 2004  
4 of 4

Q80155  
202-293-7060